
MOEN

Buy it for looks. Buy it for life.®

Specifications

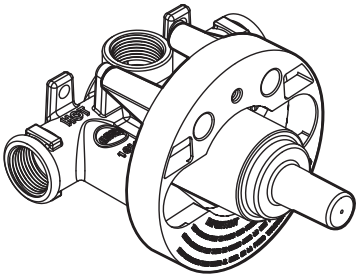

ExactTemp®
3/4" Thermostatic Valve

Model: S3371


DESCRIPTION
- Brass construction
- 3/4" IPS connections
- Thermostatic valve design with integral checkstops


OPERATION
- Temperature lever operates through a 340 degree arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 105 degrees F (41degrees C)
- Safety stop override allows maximum temperature at 120 degrees F (49 degrees C)
- Factory established temperature range from 80 degrees F (27 degrees C) to 120 degrees F (49 degrees C)
- Must be used with at least one S3600 valve.

CARTRIDGE
- Thermostatic cartridge design with non metallic/nonferrous materials


STANDARDS
- Third party certified to meet ASME A112.18.1/CSA B-125.1, CSA B125.3, ASSE 1016, ASSE 1070 and all applicable requirements referenced therein

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

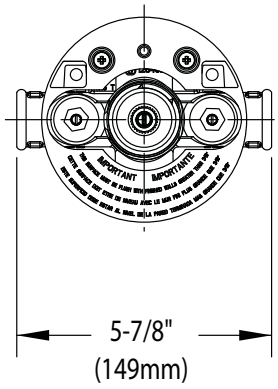

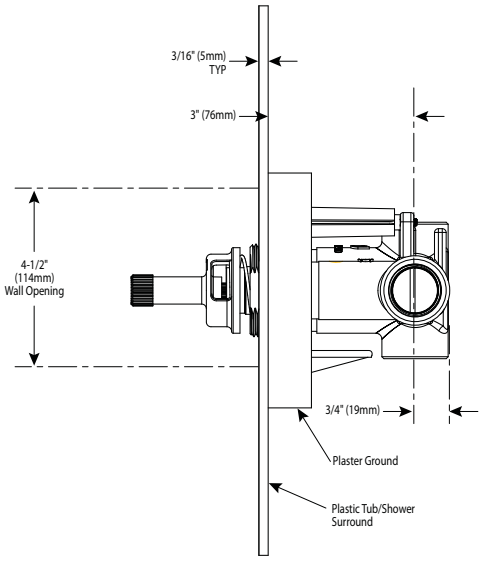

Thin Wall

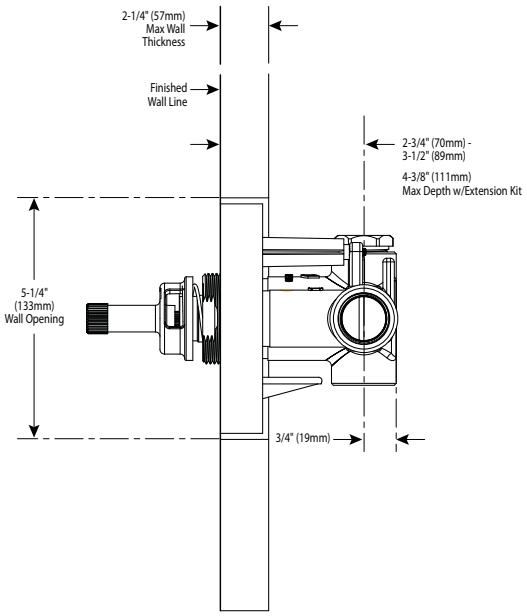

Thick Wall

CRITICAL DIMENSIONS

(DO NOT SCALE)

10/17/2012 SPEC13025
Released 001

MOEN®

BỘ SEN ÂM TƯỜNG MOEN M22050 (OPTION 2)

2 ĐƯỜNG NƯỚC

MẶT ĐỨNG
(Nhìn thẳng)



1800 - 2000
(từ mặt đất đến đầu sen)




1100 - 1200
(từ mặt đất đến tâm van chuyển nước)



1000 - 1100
(từ mặt đất đến tâm van chính điều khiển)

MẶT CẠNH
(Nhìn từ bên)

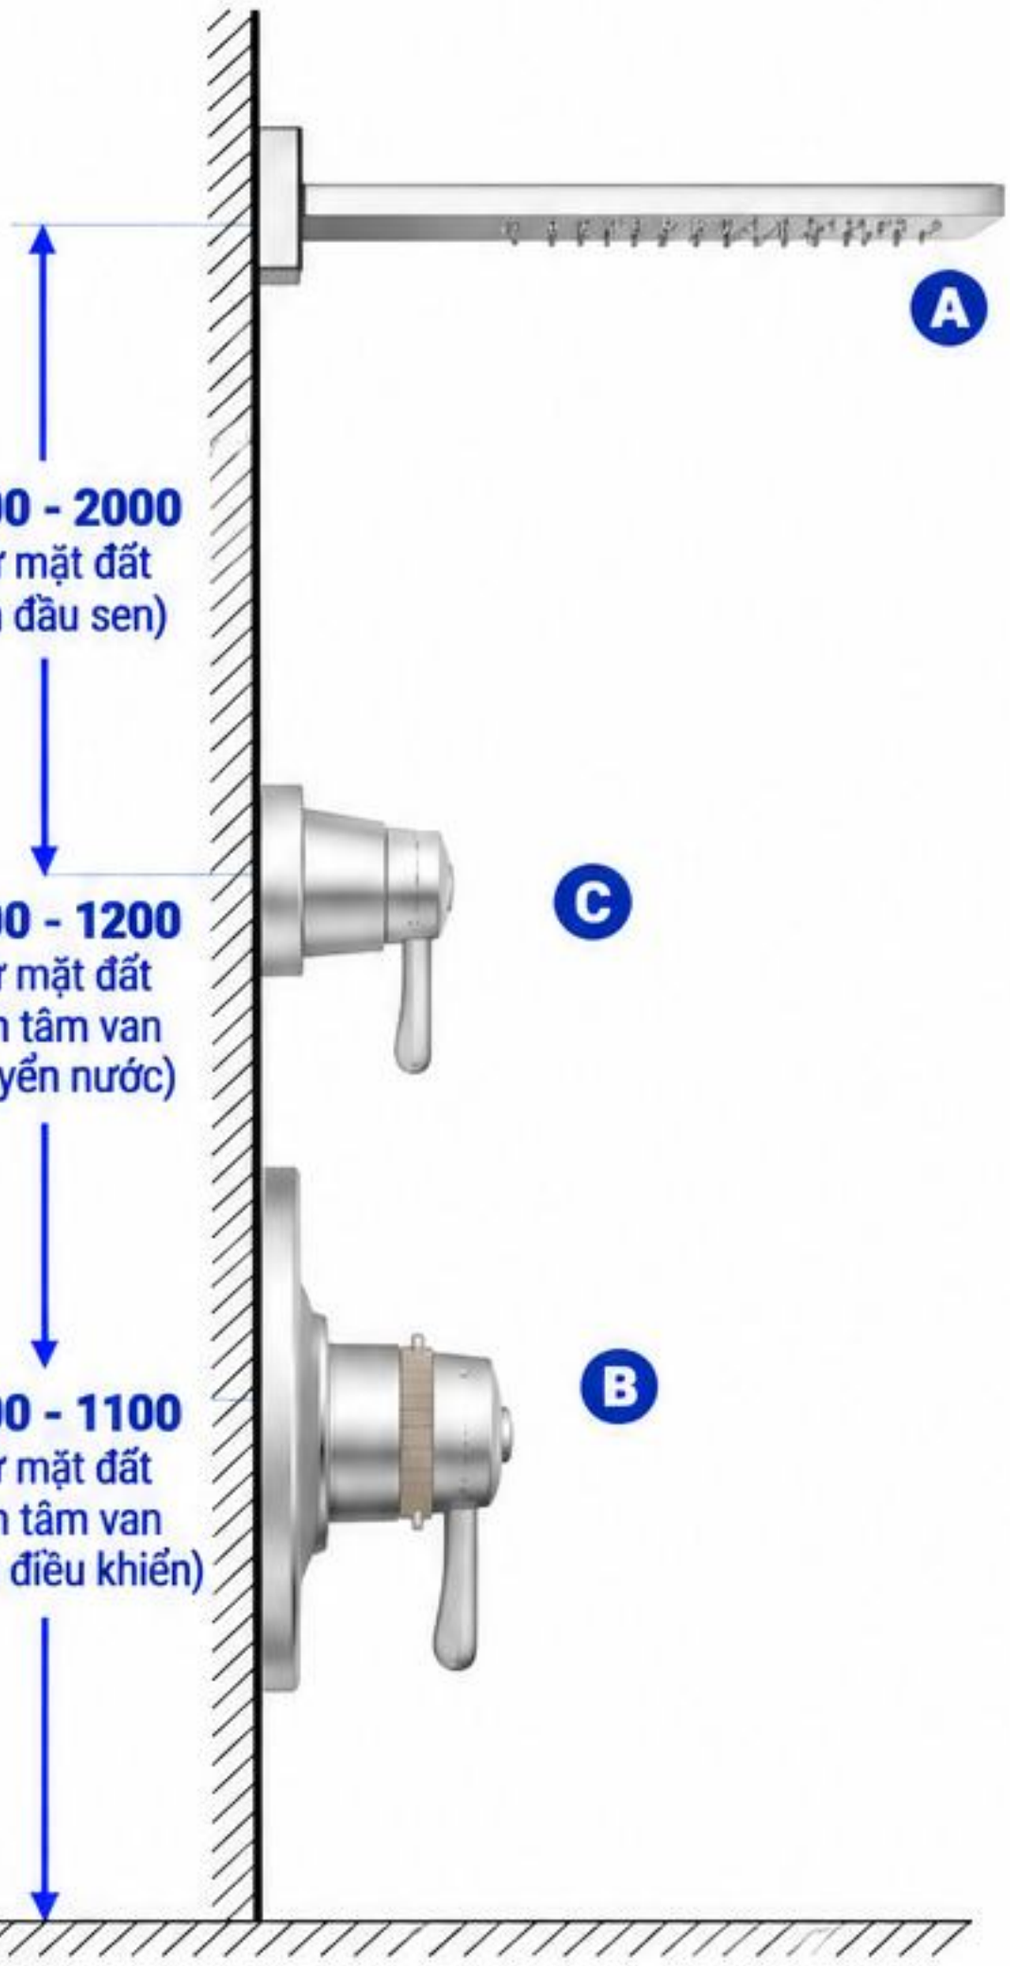

1800 - 2000
(từ mặt đất đến đầu sen)

1100 - 1200
(từ mặt đất đến tâm van chuyển nước)

1000 - 1100
(từ mặt đất đến tâm van chính điều khiển)

SÀN HOÀN THIỆN

CÁC BỘ PHẬN SẢN PHẨM

A



Đầu sen 3 chế độ MOEN
M22050

B



Bộ van chính điều khiển
TS3411 + S3371

C



Bộ van chuyển nước
TS3600 + S3600

SƠ ĐỒ NGUYÊN LÝ HOẠT ĐỘNG (2 ĐƯỜNG NƯỚC)



CAO ĐỘ THAM KHẢO – KÍCH THƯỚC CHÔN ÂM VÀ CỔNG ĐẦU NỐI THEO TÀI LIỆU HƯỚNG DẪN CỦA MOEN